

9" Value Dolly Mounted

RADAR SPEED SIGNS



THE VALUE SERIES OF RADAR SPEED SIGNS

The TrafficCalm® Value series of Radar Speed Signs offer an economical, yet rugged solution to help reduce vehicle speeds and increase road and pedestrian safety. They are designed for situations where drivers need to be alerted to their current speed, but the additional data collection and speed triggered warning messages are not needed. The dolly mounted versions are battery powered and designed to easily deploy to areas of concern.

The Value Series features bright 9" (22.9 cm) LED characters that can be legible from up to 450 ft (137.2 m) away and help increase driver awareness of their speed on neighborhood streets where so many crashes occur each year.

Speed can kill. A pedestrian is 82 percent more likely to be fatally injured if hit by a vehicle traveling 40 MPH (64 KPH) vs a vehicle traveling 20 MPH (32 KPH). Speeding drivers are almost three times more likely to be involved in fatal or serious-injury crashes. Radar Speed Signs have been proven, by multiple third-party studies*, to be highly effective at reducing average vehicle speeds and slowing speeding drivers, creating safer roadways and communities.

FEATURES

Fixed Matrix Display

The seven-segment display is able to display up to two digits from 1 to 99 with super-bright LEDs.

100% MUTCD Compliant

Amber LED's are used to meet the Federal Highway Administration Manual on Uniform Traffic Control Devices (MUTCD). Multi-color LED's and strobes that are not MUTCD compliant are not utilized.

Ruggedized Electronics

Built tougher than other systems on the market. Polycarbonate high-impact, non-glare display cover is vandal resistant, the enclosure is a metal and weather-proof sealed NEMA 3R rated enclosure.

Made in the USA

TrafficCalm® Radar Speed Signs are manufactured in the USA in an ISO 9001:2015 certified facility, meeting and exceeding industry and state testing requirements. TrafficCalm® signs are unmatched in durability, brightness, accuracy, and ease of installation and use. Build America/Buy America Compliant.

**Call for speed studies*

TRAFFICCALM.COM



RELEASED: 2023/01/17

+1 855.738.2722 / sales@trafficalm.com / www.trafficalm.com

SPECIFICATIONS

DISPLAY

Electronic Light Emitting Diode (LED) display

Speed display features 9" [22.9 cm] high electronic numbers, will display MPH or KPH, Minimum 5 MPH (8 KPH) in 1 MPH/1.6 KPH increments, Maximum 99 MPH/159.3 KPH

YOUR SPEED Legend: 3" [7.6 cm] Highway Gothic font

LEDs: Amber (590 nanometers) in color, 100,000-hour life, 15° viewing angle, AllInGaP technology

Brightness: 20,000 candela per square meter, Auto dimming

Legibility distance: 450 ft (137.2 m)

Front face sheeting: 3M™ Diamond Grade™ high visibility prismatic retroreflective sheeting

YOUR SPEED, Sign Color: Yellow, Fluorescent

Yellow-Green, Fluorescent Orange or White

Static Regulatory Sign: Speed is 25 MPH on Base. The placards are 1, 3, 0, and 4, which allows speeds from 0-45 MPH/KPH

RADAR SENSOR

K-Band (24.15 GHz), license-free (FCC part 15 compliant)

Range: Up to 1000 ft (304.8 m)

CONSTRUCTION

Outside dimensions 18" w x 24" h x 1 1/8" d

[45.7 cm x 61 cm x 4.8 cm]

Weight: 20 lbs (9.1 kg) not including dolly

Dolly Size: 72" h x 28" w x 18" d

[182.88 cm x 71.12 cm x 45.72 cm]

Weight: 113 lbs (51.3 kg) including battery and dolly

Aluminum metal enclosure, powder coated green

High impact Polycarbonate face

NEMA 3R Rated Cabinet

COMMUNICATION

Infrared Wireless Remote

POWER

Power requirements: 12VDC, low standby, average day at 8.5 watts, night at 1.5 watts

Voltage requirements: 9VDC-30VDC, 12VDC

Nominal (Battery protection at 11.5VDC and 10.8VDC, startup at 12.3VDC)

Integrated 75 Ah battery pack


AC 7.2A Smart AGM battery charger optional

ENVIRONMENTAL

-40°F to +165°F operating range [-40°C to +74°C]

WARRANTY

3 year limited warranty excluding batteries

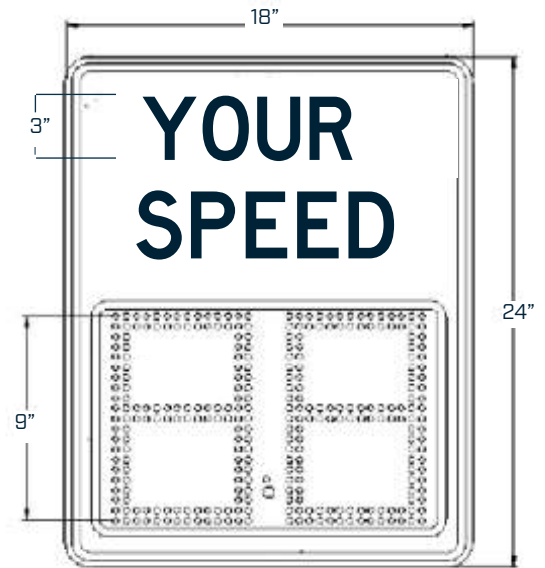

9" Value Dolly Mounted with 75Ah AGM Battery

Part #	Reflective Sheeting Color
M75-009SE-0071	White*
M75-009SE-0072	Fluorescent Yellow-Green
M75-009SE-0073	Fluorescent Orange
M75-009SE-0074	Yellow

*Non MUTCD Compliant