

iQ1500 International

RADAR SPEED SIGNS



*iQ1500 International is Available for International Orders Only

The iQ Series is our full-featured Radar Speed Sign that includes a full-matrix display, speed-triggered messages, and beacon outputs, along with traffic data collection.

The iQ1500 features bright 15" (38.1 cm) characters that can be seen from up to 750 ft (228.6 m) away and help increase driver awareness of their speed on neighborhood streets.

Speed can kill. A pedestrian is 82 percent more likely to be fatally injured if hit by a vehicle traveling 40 MPH (64 KPH) compared to a vehicle traveling 20 MPH (32 KPH). Speeding drivers are almost three times more likely to be involved in fatal or serious-injury crashes. Radar Speed Signs have been proven, in multiple third-party studies*, to be highly effective at reducing average vehicle speeds and slowing speeding drivers, creating safer roadways and communities.

FEATURES

Full Matrix Display

Full matrix displays allow the vehicle speed to be displayed in conjunction with speed-triggered messages such as "SLOW DOWN" or "TOO FAST."

Traffic Data Collection

Stores up to nine months of traffic and speed data. TC-Speed Connect™ Data Collection and Reporting Software is included with the sign, providing free local data collection for the life of the sign.

Stealth Mode

The radar can remain active without the sign displaying any message. Speed data will be collected on the controller. This is great for before and after studies to prove the effectiveness of the sign at slowing speeding drivers.

Ruggedized Electronics

Built tougher than other systems on the market. Polycarbonate high-impact, non-glare display cover is vandal-resistant. The enclosure is a metal, weather-proof, sealed NEMA 3R-rated enclosure.

**Call for speed studies*

TRAFFICALM.COM



SPECIFICATIONS

Display

Full or fixed matrix electronic Light Emitting Diode (LED) display
 Speed display features 15" (38.1 cm) high electronic numbers. Will display MPH or KPH, Minimum 5 MPH (8 KPH) in 1 MPH/1.6 KPH increments, Maximum 99 MPH/159.3 KPH
 Speed triggered messages on full matrix versions: "SLOW DOWN" or "TOO FAST" in 7" (17.8 cm) high electronic characters, two-line display for text. Highway Gothic font
 LEDs: Amber (590 nanometers) in color, 100,000-hour life, 30° viewing angle, AlInGaP technology
 Brightness: 20,000 candela per square meter, Auto dimming
 Legibility distance: 750 ft (228.6 m)
 YOUR SPEED Legend: 6" (15.24 cm) Highway Gothic font
 Front face sheeting: 3M™ Diamond Grade™ high visibility prismatic retroreflective sheeting
 YOUR SPEED Sign Color: Yellow, Fluorescent Yellow-Green, Fluorescent Orange or White

Radar Sensor

Doppler Radar
 K-Band (24.15 GHz), license-free (FCC part 15 compliant)
 Radar detection range up to 1000 ft. (304.8 m) depending upon vehicle size, speed of approach, and configuration

Construction

Outside dimensions 30" w x 41" h x 3" d (76.2 cm x 104.14 cm x 7.62 cm)
 Weight: 40 pounds (18.1 kg)
 Aluminum metal enclosure, powder coated green
 High impact polycarbonate face
 NEMA 3R Rated Cabinet

Includes built-in-bracket for mounting to a post/pole. If "Quick Disconnect" bracket is requested, must also order Pole Bracket (015-03064-000) and Sign Bracket (015-03065-0000)

Communication

RS-232 and Bluetooth Class 1 or 2 adaptors (capabilities; V1.0, V1.2, V2.0, V2.1,+ Enhanced Data Rate, EDR)

Power

Solar/Battery kits or AC power supply sold separately
 Power requirements: 12VDC, low standby 422 megawatts, average day at 20 watts, night at 5.3 watts
 Voltage requirements: 9VDC-30VDC

Environmental

-40°F to +165°F operating range (-40°C to +74°C)



Warranty

3-year limited warranty, 1-year on batteries
 Unlimited tech support from US based factory technicians

DETAILS

TC-Speed Connect™ Configuration and Traffic Data Collection Software

Local configuration, scheduling and data reports
 License Free
 App for Android and Microsoft Store
 System Health Data: battery voltage, internal temperature, ambient light lux, display function status
 Speed Data: date stamp, time stamp, vehicle count, minimum speed, maximum speed, 10 speed bins, average speed, 25th percentile speed, 50th percentile speed, 85th percentile speed
 Schedule can be programmed up to 1 year in advance

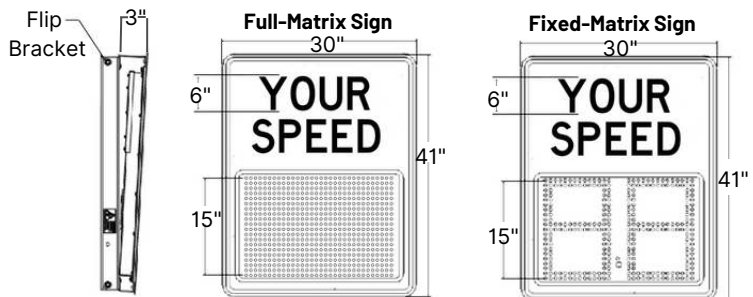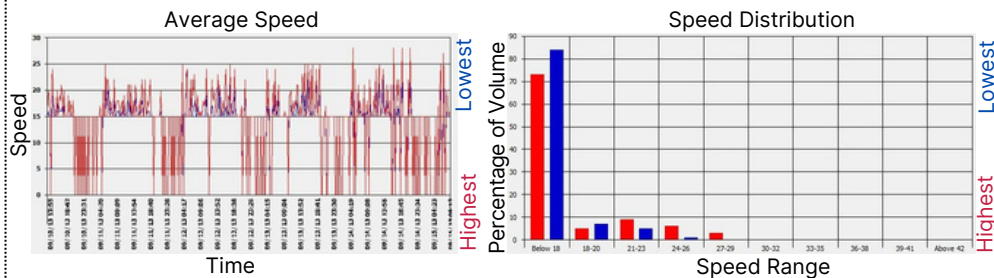

iQ1500 with 2-digits, full-matrix, amber LEDs (USA and International)

Part #	Reflective Sheeting Color
M75-15DFB-U001	White*
M75-15DFB-U002	Fluorescent Yellow-Green
M75-15DFB-U003	Fluorescent Orange
M75-15DFB-U004	Yellow

*Non USA MUTCD Compliant

iQ1500 International with 2-digits, full-matrix, amber LEDs with white strobe (International only)

Part #	Reflective Sheeting Color
M75-15-DFB-U0S1	White*
M75-15-DFB-U0S2	Fluorescent Yellow-Green
M75-15-DFB-U0S3	Fluorescent Orange
M75-15-DFB-U0S4	Yellow

iQ1500 International with 2-digits, 7-segments, amber and red LEDs with white strobe (International only)

Part #	Reflective Sheeting Color
M75-15DFB-0001	White*
M75-15DFB-0002	Fluorescent Yellow-Green
M75-15DFB-0003	Fluorescent Orange
M75-15DFB-0004	Yellow

iQ1500 International with 3-digits, 7-segments, amber and red LEDs with white strobe (International only)

Part #	Reflective Sheeting Color
M75-15DFB-2501	White*
M75-15DFB-2502	Fluorescent Yellow-Green
M75-15DFB-2503	Fluorescent Orange
M75-15DFB-2504	Yellow

*Not pictured above